

SLANGEFORSKRUNING

Messing - Type EN 14420-S/DIN 2817

EN ISO 228-1 Udvendig B.S.P. gevind

Varenummer	B.S.P. Gevind	Slange diameter
5940100-0130	1/2"	DN - 12
5940100-0190	3/4"	DN - 19
5940100-0250	1"	DN - 25
5940100-0320	1 1/4"	DN - 32
5940100-0380	1 1/2"	DN - 38
5940100-0500	2"	DN - 50
5940100-0650	2 1/2"	DN - 63
5940100-0750	3"	DN - 75
5940100-1000	4"	DN - 100



Slangestuds med udvendig gevind, EN ISO 228-1
(Parallel BSP med plan pakflade) med glat slangehals.

Monteres med spændbakker EN 14420-3/DIN 2817


Vare nr. aluminium: 5605042-

Vare nr. rustfri: 5605042R

Arbejdstryk: 25bar

EN ISO 228-1 Indvendig B.S.P. gevind

Varenummer	B.S.P. Gevind	Slange diameter
5940150-0200	3/4"	DN - 19
5940150-0250	1"	DN - 25
5940150-0320	1 1/4"	DN - 32
5940150-0380	1 1/2"	DN - 38
5940150-0500	2"	DN - 50
5940150-0630	2 1/2"	DN - 63
5940150-0750	3"	DN - 75
5940150-1000	4"	DN - 100

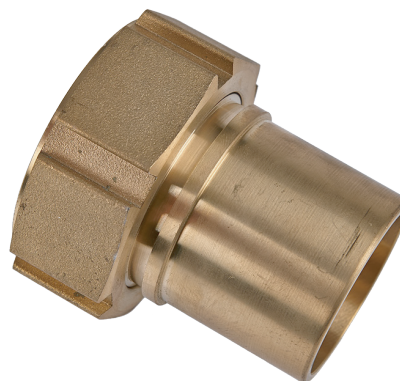

Slangeforskruning med udvendig gevind, EN ISO 228-1
(Parallel BSP med plan pakflade) med glat slangehals.

Den kan også leveres i rustfri stål (AISI - 316).

Monteres med spændbakker EN 14420-3/DIN 2817

Vare nr. aluminium: 5605042-

Vare nr. rustfri: 5605042R

Arbejdstryk: 25bar



SØRENSEN & KOFOED A/S

SMEDEHOLM 7-9 2730 HERLEV TLF: 44 92 10 88 WWW.SKDK.DK

SLANGEFORSKRUNING

Rustfri - Type EN 14420-5/DIN 2817

EN ISO 228-1 Udvendig B.S.P. gevind

Varenummer	B.S.P. Gevind	Slange diameter
5940100R0130	1/2"	DN - 12
5940100R0190	3/4"	DN - 19
5940100R0250	1"	DN - 25
5940100R0320	1 1/4"	DN - 32
5940100R0380	1 1/2"	DN - 38
5940100R0500	2"	DN - 50
5940100R0650	2 1/2"	DN - 63
5940100R0750	3"	DN - 75
5940100R1000	4"	DN - 100



Slangestuds med udvendig gevind, EN ISO 228-1
(Parallel BSP med plan pakflade) med glat slangehals.

Monteres med spændbakker EN 14420-5/DIN 2817


Vare nr. aluminium: 5605042-

Vare nr. rustfri: 5605042R

Arbejdstryk: 25bar

EN ISO 228-1 Indvendig B.S.P. gevind

Varenummer	B.S.P. Gevind	Slange diameter
5940150R0200	3/4"	DN - 19
5940150R0250	1"	DN - 25
5940150R0320	1 1/4"	DN - 32
5940150R0380	1 1/2"	DN - 38
5940150R0500	2"	DN - 50
5940150R0630	2 1/2"	DN - 63
5940150R0750	3"	DN - 75
5940150R1000	4"	DN - 100

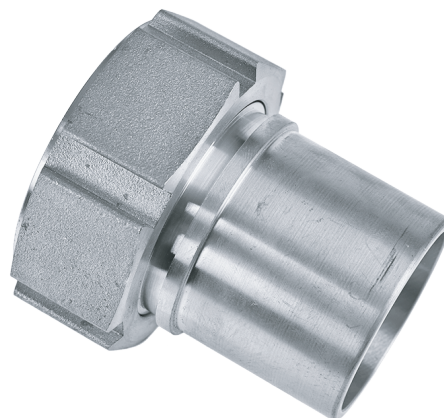

Slangeforskruning med udvendig gevind, EN ISO 228-1
(Parallel BSP med plan pakflade) med glat slangehals.

Monteres med spændbakker EN 14420-5/DIN 2817

Vare nr. aluminium: 5605042-

Vare nr. rustfri: 5605042R

Arbejdstryk: 25bar



SØRENSEN & KOFOED A/S

SMEDEHOLM 7-9 2730 HERLEV TLF: 44 92 10 88 WWW.SKDK.DK

SLANGEFORSKRUNING

Slangestuds med B.S.P. udvendig gevind

Varenummer	Dimension studs	B.S.P. Gevind
5940200-0130	1/2"	1/2"
5940200-0190	3/4"	3/4"
5940200-0200	1"	1"
5940200-0320	1 1/4"	1 1/4"
5940200-0380	1 1/2"	1 1/2"
5940200-0500	2"	2"
5940200-0630	2 1/2"	2 1/2"
5940200-0750	3"	3"
5940200-0800	3"	3"
5940200-1000	4"	4"



Fremstillet i messing
Kan også leveres i rustfri stål.

Slangestuds med B.S.P. indvendig gevind

Varenummer	Dimension studs	B.S.P. Gevind
5940250-0130	1/2"	1/2"
5940250-0190	3/4"	3/4"
5940250-0250	1"	1"
5940250-0320	1 1/4"	1 1/4"
5940250-0380	1 1/2"	1 1/2"
5940250-0500	2"	2"
5940250-0630	2 1/2"	2 1/2"
5940250-0750	3"	3"
5940250-0800	3"	3"
5940250-1000	4"	4"



Fremstillet i messing
Kan også leveres i rustfri stål.



SØRENSEN & KOFOED A/S

SMEDEHOLM 7-9 2730 HERLEV TLF: 44 92 10 88 WWW.SKDK.DK