

# KABEL BESKYTTELSE


5-4a

**Forskruning, lige**

Til metal beskyttelsesslanger.

**Fitting, stright**

For steel conduits.

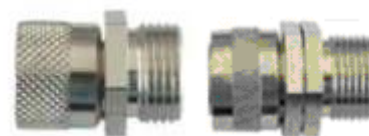

Til enkeltfåset galvaniseret eller rustfri beskyttelsesslanger fremstiller ANACONDA en serie metriske forskruninger af forniklet messing, der også kan leveres med udvendigt drejelig gevind. Tæthed: IP54. Temperaturområde: -45° C / +250° C.

*For square-locked galvanized or stainless steel conduits ANACONDA produce a series of fittings with metric thread. Made out of Brass. IP54. Temperature range: -45° C / +250° C.*

**Without Swivel**

S&K nr.	Gevind/Thread	Min. øi slange	El nr.	EAN nr.
100800010	M10	5,0	-	
100800012	M12	8,0	-	
100800016	M16	10,5	-	
100800020	M20	12,5	-	
100800220	M 20	14,0	-	
100800025	M25	17,5	-	
100800032	M32	24,5	-	
100800040	M40	33,5	-	
100800050	M50	44,0	-	

**With Swivel**

S&K nr.	Gevind/Thread	Min. øi slange	El nr.	EAN nr.
100800110	M10	5,0	-	
100800112	M12	8,0	-	
100800116	M16	10,5	-	
100800120	M20	12,5	-	
100800420	M20	14,0	-	
100800125	M25	17,5	-	
100800132	M32	24,5	-	
100800140	M40	33,5	-	
100800150	M50	44,0	-	

**SØRENSEN & KOFOED A/S**

Smedeholm 7-9, 2730 Herlev. Tlf: 44921088 www.skdk.dk