

# KABEL BESKYTTELSE

8-22

## SLANGEHOLDER

Rør-, slange- og kabelholder

### Corrugated Tube holder



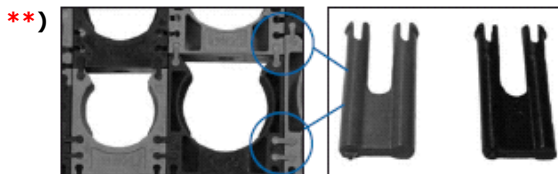
Slangeholderen af Nylon (PA6). Er beregnet til montering af slanger og rør på vægge, maskiner m.v. Temperaturområde -40 °C / +105 °C. Halogenfri og overholder UL94 V-2. Farve: **sort**. Kan også leveres i grå.

Tube holder made of Polyamide PA6 according to UL94 V-2. Applications: Mechanical- railway- and robot engineering. Facility construction. Temperature range: -40 °C / +105 °C. Free of halogen. Colour: **black**. Grey on request.

### Colour: Black

S&K nr.	Dimension B. x L x H	Anvendes til NW	EI-nr.	EAN nr.
101830000-1	20x20x18 mm.	7,5	-	
101831000-1	20x20x23 mm.	10	-	
101832000-1	20x22x26 mm.	12+13	-	
101833000-1	20x28x33 mm.	14+16	-	
101834000-1	20x28x33 mm.	17	-	
101835000-1	20x35x40 mm.	23	-	
101836000-1	20x43x45 mm.	29	-	
101837000-1	20x54x53 mm.	37	-	
101838000-1	20x68x66 mm.	50	-	
101839075	Dæksel *)	7,5 + 10	-	
101839120	Dæksel *)	12 + 13	-	
101839140	Dæksel *)	14 + 16 + 17	-	
101839230	Dæksel *)	23	-	
101839290	Dæksel *)	29	-	
101839370	Dæksel *)	37	-	
101839500	Dæksel *)	50	-	
101839600	Samlingsstykke **)	7,5-50	-	

All dimensions without tolerances are for reference only.  
Dimensioner uden toleranceangivelse er kun vejledende.

**SØRENSEN & KOFOED A/S**

Smedeholm 7-9, 2730 Herlev. Tlf: 44921088 www.skdk.dk