


SLANGEKOBLINGER, ICS


ICS BFO – BSP hun 60° konus med o-ring

| Varenummer | Slangestørrelse | | | BSP gevind størrelse | Dimension (mm) | | |
|----------------|-----------------|--------|------|----------------------|----------------|-----|----|
| | DN | Inch | Dash | F | H | L | S |
| 0222ICSBFO1212 | 19 | 3/4" | -12 | 3/4" - 14 | 29 | 80 | 32 |
| 0222ICSBFO1216 | 19 | 3/4" | -12 | 1" - 11 | 33 | 84 | 41 |
| 0222ICSBFO1616 | 25 | 1" | -16 | 1" - 11 | 34 | 90 | 41 |
| 0222ICSBFO1620 | 25 | 1" | -16 | 1 1/4" - 11 | 38 | 95 | 50 |
| 0222ICSBFO2020 | 31,5 | 1 1/4" | -20 | 1 1/4" - 11 | 39 | 106 | 50 |
| 0222ICSBFO2024 | 31,5 | 1 1/4" | -20 | 1 1/2" - 11 | 42 | 109 | 60 |
| 0222ICSBFO2424 | 38 | 1 1/2" | -24 | 1 1/2" - 11 | 43 | 125 | 60 |
| 0222ICSBFO3232 | 51 | 2" | -32 | 2" - 11 | 47 | 143 | 75 |



ICS BFO4 – BSP hun 60° konus med o-ring, 45° bøjning


| Varenummer | Slangestørrelse | | | BSP gevind størrelse | Dimension (mm) | | | |
|-----------------|-----------------|--------|------|----------------------|----------------|-----|----|----|
| | DN | Inch | Dash | F | H | L | S | K |
| 0222ICSBFO41212 | 19 | 3/4" | -12 | 3/4" - 14 | 29 | 80 | 29 | 32 |
| 0222ICSBFO41216 | 19 | 3/4" | -12 | 1" - 11 | 33 | 84 | 32 | 41 |
| 0222ICSBFO41616 | 25 | 1" | -16 | 1" - 11 | 34 | 90 | 36 | 41 |
| 0222ICSBFO41620 | 25 | 1" | -16 | 1 1/4" - 11 | 38 | 95 | 37 | 50 |
| 0222ICSBFO42020 | 31,5 | 1 1/4" | -20 | 1 1/4" - 11 | 39 | 106 | 43 | 50 |
| 0222ICSBFO42024 | 31,5 | 1 1/4" | -20 | 1 1/2" - 11 | 42 | 109 | 43 | 60 |
| 0222ICSBFO42424 | 38 | 1 1/2" | -24 | 1 1/2" - 11 | 43 | 125 | 51 | 60 |
| 0222ICSBFO43232 | 51 | 2" | -32 | 2" - 11 | 47 | 143 | 65 | 75 |

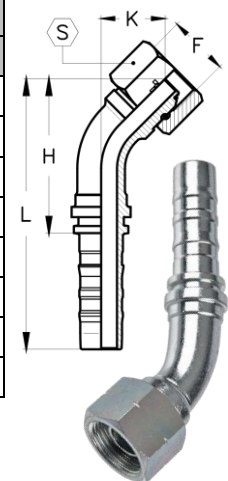

SLANGEKOBLINGER, ICS


ICS BFO9 – BSP hun 60° konus med o-ring, 90° bøjning

| Varenummer | Slangestørrelse | | | BSP gevind størrelse | Dimension (mm) | | | |
|-----------------|-----------------|--------|------|----------------------|----------------|-----|-----|----|
| | DN | Inch | Dash | | F | H | L | S |
| 0222ICSBFO91212 | 19 | 3/4" | -12 | 3/4" - 14 | 55 | 106 | 57 | 32 |
| 0222ICSBFO91216 | 19 | 3/4" | -12 | 1" - 11 | 55 | 106 | 61 | 41 |
| 0222ICSBFO91616 | 25 | 1" | -16 | 1" - 11 | 71 | 128 | 72 | 41 |
| 0222ICSBFO91620 | 25 | 1" | -16 | 1 1/4" - 11 | 71 | 128 | 74 | 50 |
| 0222ICSBFO92020 | 31,5 | 1 1/4" | -20 | 1 1/4" - 11 | 87 | 154 | 88 | 50 |
| 0222ICSBFO92024 | 31,5 | 1 1/4" | -20 | 1 1/2" - 11 | 87 | 154 | 88 | 60 |
| 0222ICSBFO92424 | 38 | 1 1/2" | -24 | 1 1/2" - 11 | 105 | 188 | 104 | 60 |
| 0222ICSBFO93232 | 51 | 2" | -32 | 2" - 11 | 140 | 237 | 137 | 75 |

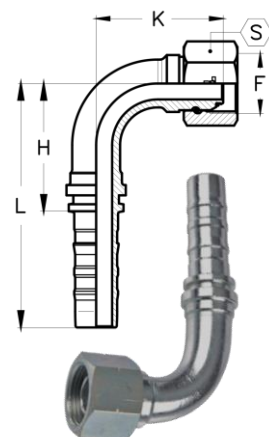

ICS BM – BSP han 60° konus

| Varenummer | Slangestørrelse | | | BSP gevind størrelse | Dimension (mm) | | |
|-----------------|-----------------|--------|------|----------------------|----------------|-----|----|
| | DN | Inch | Dash | | F | H | L |
| 0222ICSBM1212 * | 19 | 3/4" | -12 | 3/4" - 14 | 38 | 89 | 32 |
| 0222ICSBM1216 | 19 | 3/4" | -12 | 1" - 11 | 43 | 94 | 41 |
| 0222ICSBM1616 * | 25 | 1" | -16 | 1" - 11 | 45 | 101 | 41 |
| 0222ICSBM1620 | 25 | 1" | -16 | 1 1/4" - 11 | 48 | 104 | 50 |
| 0222ICSBM2020 * | 31,5 | 1 1/4" | -20 | 1 1/4" - 11 | 50 | 117 | 50 |
| 0222ICSBM2024 | 31,5 | 1 1/4" | -20 | 1 1/2" - 11 | 53 | 120 | 55 |
| 0222ICSBM2424 * | 38 | 1 1/2" | -24 | 1 1/2" - 11 | 55 | 138 | 55 |
| 0222ICSBM3232 * | 51 | 2" | -32 | 2" - 11 | 63 | 159 | 70 |



* Kan også skaffes med konisk gevind (0222ICSBMTxxxx). Data og dimensioner oplyses på forespørgsel

O-ringe 70 shore for ICS BFO slangeindstik

| Varenummer | For gevind | S&K Str. |
|-------------------|-------------|----------|
| 0245 17.00 X 1.50 | 3/4" - 14 | 12 |
| 0245 22.00 X 1.50 | 1" - 11 | 16 |
| 0245 28.30 X 1.78 | 1 1/4" - 11 | 20 |
| 0245 33.05 X 1.78 | 1 1/2" - 11 | 24 |
| 0245 44.17 X 1.78 | 2" - 11 | 32 |

